

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04K 1/00		A1	(11) International Publication Number: WO 95/08231
			(43) International Publication Date: 23 March 1995 (23.03.95)
(21) International Application Number: PCT/US94/10455		(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LT, LU, LV, MD, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD).	
(22) International Filing Date: 14 September 1994 (14.09.94)			
(30) Priority Data: 08/122,005 14 September 1993 (14.09.93) US			
(60) Parent Application or Grant (63) Related by Continuation US 08/122,005 (CON) Filed on 14 September 1993 (14.09.93)		Published With international search report.	
(71) Applicant (for all designated States except US): SPYRUS, INC. [US/US]; Suite 207, 2880 Zanker Road, San Jose, CA 95134 (US).			
(72) Inventor; and (75) Inventor/Applicant (for US only): DOLPHIN, Janet, Lynn [US/US]; 602 Carisbad Street, Milpitas, CA 95035 (US).			
(74) Agent: CHAVEZ, Paula, N.; Gray Cary Ware & Freidenrich, 400 Hamilton Avenue, Palo Alto, CA 94301-1825 (US).			

(54) Title: ACCESS CONTROL FOR PORTABLE DATA STORAGE MEDIA

(57) Abstract

The system and method of the present invention provides the support of high density removable media (84), such as CD-ROM or MO, to be used as distributed media for storing data where access thereto is securely restricted. Through this system and method, the secure periodic distribution of several different sets of data information (78) to the end user is achieved with access control selectively performed by at the user's site through communication with the billing/access center (81 & 82). User billing is based on the purchase of the decryption access codes (81 & 82) as indicated by the access code attributes encoded on the media (84). Access code availability is further controlled by selectively providing for updates of decryption access codes.

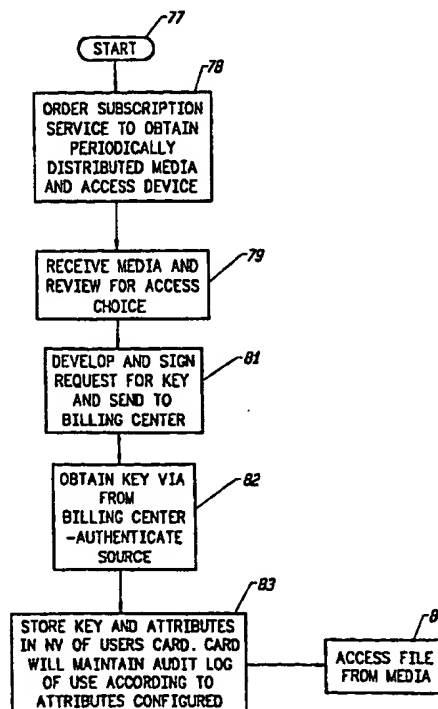

SUBSCRIBERS KEY REQUEST PROCESS

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

ACCESS CONTROL FOR PORTABLE DATA STORAGE MEDIA

Field of the Invention

5 The present invention relates to providing access to data stored on a portable data storage unit. More particularly, it relates to a system for delivering encrypted data on a portable data storage unit and transmitting an access code from a remote location to decrypt the encrypted data.

Background of the Invention

10 As advances in data high density storage technology continue to progress, more homes and business are acquiring computer peripherals capable of reading the new forms of portable data storage media. For example, high-density media such as compact disc - read only memory (CD-ROM) is becoming a popular medium for storing advanced forms of electronic information such as textual, visual (video or photographs) and audio information as well as interactive media. CD-ROMs contain
15 enough storage space to hold the equivalent of 250,000 pages of text, 12,000 images, 1.5 hours of video, 500 paperback books or 430 magazines. Moreover, CD-ROM technology supports an extremely cost effective replication feature averaging \$0.05 per replicated CD. CD-ROM players can be coupled to television sets or computers so that the user can access textual and visual information as well as audio information
20 stored on a CD-ROM.

 It is common practice for most publishers to collect and process their information electronically, that is, on word processors and computers. Their data is maintained in electronic form until it is time to mail it to the subscriber. At that time, the information is printed, subscribers mail labels are attached and the published
25 information is sent via a postal service to the subscriber. Under this system, the costs

of printing and delivery are extremely high. Moreover, environmental concerns have necessitated the need to consider paper a critical resource. Accordingly, the need for a new publishing medium has been recognized. For example, see U.S. Patent Nos. 4,827,508, 4,977,594 and 5,050,213, issued May 2, 1989, December 11, 1990 and September 17, 1991 respectively to Shear.

Subscription services to the home and office through standard postal channels provide subscribers with magazines, trade journals, financial updates and book of the month clubs. These subscription services require the user (subscriber) to pay a fixed amount either in advance or monthly. During the time which the subscription is valid, the publisher continues to mail its information to that subscriber. Moreover, any single user may be the subscriber of a multitude of journals or magazines. It is also likely a single subscriber may hold subscriptions to several magazines published by the same publisher.

Also other types of published or archived information, such as corporate, government, or legal records, are printed on paper for dissemination. When disseminated, such records may inadvertently or intentionally be read by those unauthorized to do so since there is no way to insure that the reader is authorized to access to printed matter. Moreover, since some published corporate or legal information is subject to constant updates which renders the previously published material obsolete, it is preferable but often difficult to purge dated material from circulation.

Again referring to the Shear patents, these systems audit or meter a user's access activity. Because a key to unlock encrypted data is present on the user's hardware, such as a PCMCIA card, the decryption function is inhibited at the user's site in order to prevent unauthorized access to the data. Thus, according to the systems of Shear, access to the information on the portable storage medium, such as a CD-ROM, is available to a user without prior authorization for access. Therefore, there is no way to insure that the reader is authorized to access to the information

stored on the CD-ROM prior to the user's access. Furthermore, those systems do not provide a way in which access to out-of-date information can be blocked.

5 The need for protection of information stored on, for example, CD-ROMs, from unauthorized access needs to be satisfied before such a publication distribution system is acceptable to publishers. Security provided at both the publisher's site and subscriber's site is needed to prevent the unauthorized access to data contained on the media. Moreover, valid subscribers need to be protected when their subscription service is terminated.

10 Summary of the Invention

There are at least three basic features of the present invention. They include, encryption of data in a particular manner, distribution of the data under a particular distribution scheme and controlling the use of the data through an update scheme. Many benefits are provided by these basic features as will be discussed in detail below.

15 This invention includes publishing data on a removable or portable media, preferably high density, such as a CD-ROM or a magnetic optical (MO). Thus, one or more publishers may incorporate several, if not, all of their periodic publications on a single media. The present invention includes partitioning the media according to the different publications into data sets, and then providing a protection, access, and use
20 audit scheme to these data sets. Thus, only validated subscribers are able to gain access to the information stored on the CD-ROM.

Another important feature of the present invention is that it provides the publisher the tools to configure and set up data and billing according to the publisher's own choice. At the time they create the media, publishers are provided flexibility in
25 billing to charge subscribers in accordance with the type of information being sold. This flexibility is incorporated into the publishing process.

More specifically, the protection and access scheme of the present invention includes providing the publisher with an encryption tool on, for example, a personalized PCMCIA, or other suitable program storage medium. Under this implementation of the present invention, when the publisher loads a program stored locally, menu driven options appear on the publisher's computer screen which allow the publisher to define the user's or subscriber's access to the publisher's data. The billing options are also known as "attributes," which include, for example, subscription duration. The billing attributes are associated with Key Material Identifiers (KMIDs), which are in essence, indexes or identifying codes for the purpose of correlating billing attributes with access codes. Access code and key are used interchangeably herein. An access code corresponding to a particular segment of data stored on the CD-ROM is ultimately downloaded to the subscriber so that they may gain access to the information.

The program stored on the publisher's PCMCIA enables the publisher to encrypt the data so that an access code or key is required to decrypt it. The encrypted or scrambled data along with the KMID is then stored on a portable storage medium. Corresponding billing information is also stored in a separate file for the user's review. The CD-ROM is then transferred to the user. The user is also in possession of a PCMCIA, or other suitable storage medium which has on it software for communicating with the billing/access center and managing downloaded access codes. The user further has available a telephone line or comparable medium, a computer with a modem and peripherals capable of reading the PCMCIA and the CD-ROM.

An application on the user's personal computer enables a menu to appear on the screen of the computer when the user loads the CD-ROM containing publisher's data into its reading hardware. The menu lists, for example, the publications available for sale and the billing information. The user then, via the software stored on the PCMCIA card, requests access to one or more of the publications by highlighting or pointing to a publication for sale and then sending the request to the billing/access center. The KMID or identifying index and required billing data, such as a credit or

debit card number, is sent to a remote billing station via the telephone line. The billing station, upon credit approval, matches the KMID to the access code and transmits the key and access parameter, e.g. time of subscription purchased, to the user via the telephone line. The key is then installed on the user's PCMCIA card. The user may then access the particular publication which is accessible by that particular access code or key.

Brief Description of the Drawings

Figure 1 depicts the overall system of the present invention;

Figure 2 shows the user/billing station subsystem of Box 11 of Figure 1;

Figure 3 shows the publisher/billing station subsystem of Box 12 of Figure 1;

Figure 4 is a schematic showing the information sent to the billing/access center by the publisher and by the user;

Figure 5 is a block diagram of some elements of the publisher's station of the present invention;

Figure 6 is a block diagram of the publisher's PCMCIA;

Figure 7 is a flow chart of publisher's billing software;

Figure 8 depicts a screen display of attribute choices available during the publisher's utilization of the present invention;

Figure 9 depicts a second screen display of security choices available during the publisher's utilization of the present invention;

Figure 10 shows a list of the type of information stored on the removable media of the present invention;

Figure 11 is a block diagram of some elements of the subscriber's station of the present invention;

Figure 12 is a block diagram of the subscriber's PCMCIA;

Figure 13 is a flow chart of the subscriber's key request process;

Figure 14 is a block diagram of key data base and billing/access center;

Figure 15 is a flow chart of the billing/access center process; and

Figure 16 is a chart illustrating the cryptographic update feature of the present invention.

Detailed Description of the Invention

The system and method of the present invention generally includes two subsystems and submethods. The first part of this discussion will focus upon the two subsystems and how they interrelate in order to make the whole system. The second part of this discussion which begins below, will concentrate on the implementation of each part of the system.

Referring to FIG. 1, box 11 and box 12 are two different portions of the overall system which overlap at box 13. In box 12, the publisher 21 of data is shown. The data can include any type of data which can be stored on a portable storage unit 22 such as, and hereinafter referred to as CD-ROM 22. After the data is generated and before it is stored on the CD-ROM 22, it is encrypted or scrambled so that it cannot be accessed without the appropriate access code. Accordingly, the present invention incorporates standard cryptographic techniques such as symmetric key encryption, digital signature, asymmetric key exchanges, or challenge response. Alternatively, this invention may utilize any non-standard cryptographic techniques.

After the publisher 21 encodes the data, it communicates certain information to billing/access center 23 shown in box 13, as will be discussed in detail below. The publisher 21 stores the encrypted data on the CD-ROM 22 and then distributes the data via distribution channels such as the postal service 24. Distribution channels can also include inter-office distribution, for example, in a corporate, government or legal environment among others. Ultimately, the CD-ROM is received by a user 26. The user has a computer (which includes a processor) or a television set or monitor with a processor and a CD-ROM reader. The user's computer is equipped with either a software program and/or hardware which is used to communicate with billing/access center 23 and which has a controller to process the data received from billing/access center 23.

When the user 26 loads the CD-ROM 22 into its CD-ROM reader, the user is presented with a menu on the computer or television monitor or screen which

indicates what data is stored on the CD-ROM 22. A portion of the data on the CD-ROM 22 may not be encrypted so the user can access that portion without an access code. However, at least a portion of the data, according to the present invention, is encrypted. In order for the user to access the encrypted data, the user must obtain an access code or a key to decrypt the encrypted data. In order to obtain an access code, the user 26 communicates with the billing/access center 23 via connection 27, which is a telephone line or other communication apparatus or device, sending a request for a particular access code. Upon authorization, billing/access center 23 downloads or sends to the user 26 via connection 27, an access code to decrypt the data.

FIG. 2 shows the user/billing/access center subsystem in more detail. As mentioned above, the user's computer is equipped with either a software program and/or hardware which is used to communicate with billing/access center 23 and which is used control the data received from billing/access center 23. As depicted in FIG. 2, an application to open and provide use "screens" is resident on the machine. Communication is therefore enabled between the PCMCIA card 29 which is loaded into PCMCIA drive 32 and the user operating the computer 31. The PCMCIA card 29 is supplied to user so that the user can provide a request 27' to the billing/access center 23 for an access code to decrypt encrypted data. Upon authorization, billing/access center 23 downloads or sends to the user 26 the access code via connection 27". Connection 27' and 27" can be the same line or transmission means, such including standard electronic mail formats. The access code or key is stored on the user's PCMCIA card 29 for reasons which will become clear below.

Now referring to FIG. 3, the publisher's station 36 consists of a workstation for organizing and gathering information. A writer device to create CD-ROM 35 is in communication with the publishers workstation. The publisher is provided its own publisher PCMCIA card 33 on which a software program is stored in order to allow the publisher to define and control access to the data at the time the information is

organized for publication on the CD-ROM. Alternatively, hardware can be provided to the publisher in place of software.

5 The data 34, as mentioned above can include, for example video, image, photographs, databases, sound, software. The data is either generated on or loaded onto the publisher's computer 36. In accordance with the present invention, before the data is stored on the CD-ROM 22, the publisher determines the billing partitions which are based on like data, e.g. singles magazines, single database, group of similar photographs, modules of executable software and single fonts. The publisher also separates the data into different data sets such as files, sub directories, directories and
10 volumes under different symmetric cryptographic keys so that access to each different segment is only possible with a key which matches that data segment.

The billing partitions are categorized according to how the publisher wants to bill for access to the data. Access control to the data set(s) is therefore controlled via the billing or "attribute" mechanism of the present invention. Attributes are assigned to
15 the data sets by the publisher 21 and are bound to the access code which is hereinafter referred to as the key, such used by the user 26 to decrypt the individual data sets. Each individual symmetric key is then bound to or assigned a unique Key Material Identifier (KMID) which will be described in detail below.

The attributes are defined, implemented and used to determine charges for access to the data encrypted by the user 26 prior to access. One example of an
20 attribute is time duration. For example, one CD-ROM may contain a January issue of a magazine. CD-ROMs issued for months following January may contain subsequent issues of the same magazine. The publisher may wish to offer 1 year, 2 year and 3 years subscriptions, as well as a free 1 month trial subscription. These four different
25 time durations constitute four different attributes. Thus, according to the present invention, a cryptographic update process is applied to allow can be access for fixed periods of time depending on which time duration was chosen by the user. A

configuration for an attribute is a data structure of variable length containing flags indicating which metric is present and parameters indicating metric values and units.

5 Other examples of attributes include "one time buy" attribute where the information is purchased once, and all information protected by that key is available to the subscriber. Also included is an "on demand" attribute where the use of the data is monitored based on a publisher defined parameter including number of times the key can be used, the number of transactions, number of bytes or number of files transferred. Moreover, advertising attributes such are available. For example, a "file bypass" attribute allows the publisher to define files or data sets which are bypassed or are in plain text. Also, a "trial period" attribute allows the user to obtain access to these files for a fixed period of time without a copy or print capability. Applications, such as the trial period, communicates directly with the PCMCIA card to control access to application specific functions, such as copy or print. These applications are modified to support the PCMCIA interface. Furthermore, by a "reduced resolution" attribute, the publisher allows viewing of a particular file without quality resolution. 10 The attributes can be representable by constant values and can also be functions of variables. 15

After determination of the data partitions by the publisher, and after the publisher defines the attribute to be used with each data set, the attribute is bound with a key and a Key Material Identifier (KMID). The KMID acts as an index or identifying code so that the billing/access center can provide the proper key or access code to open the desired data set. This information is combined by the publisher 21 to create a unique file containing the attribute information for the entire media to be distributed. This information is sent to the billing/access center. The software stored on the PCMCIA card 33 further allows the publisher 21 to encrypt the data and include the attribute and the KMID on the CD. 20 25

The system of the present invention therefore includes assignment of the key and KMID to a database and the keeping of such information by the billing/access

center 23. It further includes the user sending to the billing/access center a particular KMID in order to receive a key to access the desired data. These elements of this system are shown in FIG. 4, where the unique file 37 containing the key, attribute and KMID for each data set is transmitted to the billing/access center 23 which is billing or authorization center 23 by the publisher. This file 37 is downloaded into a central distribution site. The only information that needs to be written to the CD-ROM 22 is the start and stop sector information along with the KMID associated with each particular data set 38. A special "Read-Me" file can be created which allows the subscriber to read information concerning pricing (which match the attributes) for the individual data sets. The "mastered" information is then replicated and distributed by the publisher via any transport method suitable.

Returning to FIG. 2, the user 26 is able to load the CD-ROM into a CD-ROM reader 28 and read the special "Read-Me" file to see what is available on the portable storage media. When the user 26 has identified a particular data set the user wishes to access, the user 26 uses the PCMCIA card 29 which is loaded into the PCMCIA drive 32 to communicate with the billing/access center, billing/access center 23 a request including the KMID which identifies the desired key via connection 27'. The billing/access center, once having authorized access, downloads via line 27" the key associated with the KMID.

When downloaded, the key may reside on the user's PCMCIA card 29 or on appropriate hardware. The key will access the data set of the instant CD-ROM and subsequent CD-ROMs which are distributed in accordance with the limits of the attribute. Therefore, if the attribute indicates a six month time duration as indicated in box 37 and box 38 of FIG. 4, and the first access occurs in January, the user 26 may use the user PCMCIA card 29 through June in order to access the equivalent data set on subsequently distributed CD-ROMs. After the first use of the key, the subsequent use of the key is maintained and audited by the local user environment, that is, through the user PCMCIA card 29.

In order to provide for limited time duration attributes, the present invention utilizes "key zeroization " which occurs when an attribute condition is met or can be remotely invoked by the billing/access center. For example, an attribute condition having been met would include the passage of time which is monitorable by a time clock. Since updated data is released periodically, keys are derived from the originally generated key through a cryptographic update process. This feature allows the publisher to distribute its periodic information under a different key which is derived from the last key based on a cryptographic operation. The number of updates valid for a subscriber is encoded in the KMID/attribute information. The cryptographic update process of the present invention is described in detail below and with reference to FIG. 16.

The user's PCMCIA card 29 is used to audit and maintain the count of updates provided by the publisher. Each CD-ROM contains information about the update release of a particular KMID as well as time stamping information used by the user's PCMCIA card 29 for time based key management functions. A clock can also be installed on the PCMCIA card.

The zeroization feature of the present invention provides the advantage that the access of, for example, corporate, government or legal records which are frequently updated can be avoided or stopped. By using a key which zeroizes after one or only a few reviews of the data or after a short time duration, the publisher insures that out-of-date frequently updated records will not be confused with current records.

The user's PCMCIA card 29 is also used to authenticate the subscriber to the billing/access center. Each subscriber is assigned a unique public/private key pair to be used in all transmissions, such being stored on the user's PCMCIA card 29. Different users key pairs or personalities allow the user to sign purchase orders or to make purchase requests with the appropriate personalities. This feature is important in the situation where a single person holds, whether temporary or permanently, several different offices. For example, the president of a company may sign a separate

request as a purchasing agent but may sign a separate access request, with different privileges, as president of the company. Accordingly, this invention supports the authentication of different user personalities, as defined by the subscriber, to provide electronic purchase authorizations. Furthermore, each user PCMCIA card 29 contains a unique Pin Phrase to validate the user and their use of the personalities and cryptographic functions of the card at the user's site or through an optional challenge/response system.

When an individual wishes to gain access to files stored on the CD-ROM, the key must be resident on the card, that is, already purchased. If not, the subscriber must create a purchase request and send this request to the billing/access center. All requests containing payment methods, e.g. credit card numbers, are encrypted in the public/private key pair. All purchase requests can be also be signed by the appropriate authorizing personality before the billing/access center will process any purchase request.

In the situation where a purchase is not made, that is, where inter-office distribution of CD-ROM to provide corporate, government or legal information in-house, the authentication feature is especially desirable. Unauthorized access to sensitive information is more easily avoided in accordance with the present invention than when information is disseminated on printed media.

To recap, referring to FIG. 1, at the billing/access center 23 the request 27 is received in the form of, for example, electronic mail. The mail is received and the signature is validated to authenticate the source of the request. Included with the mail message is the requested KMID (see FIG. 4). This is then used as a look up index into a large database containing the stored cryptographic keys. Under one embodiment of the present invention, the following steps occur. The billing/access center 23 obtains the publisher defined attributes assigned to the KMID from the database and provides this information to the requester. The requester is then allowed to select a form of payment for the key which is sent to the billing/access center. The

5 billing/access center then validates the payment method and authorization. The KMID and its binded attributes are then sent to the user. At the user's site, the KMID and attributes are loaded onto the user PCMCIA card 29 for control of access and for audit purposes by the card. The user now has access to the purchased information. The KMID and use of the keys according to the publisher's definition is monitored and maintained by the user's PCMCIA card 29. As mentioned above, when an attribute condition is met, e.g. the subscriber has reached the number of purchase bytes or the time has expired, the user's PCMCIA card 29 will automatically zeroize with respect to that publication. Further access by the user will require another call to the
10 billing/access center 23.

The above discussion described in detail general features of the subsystems of present invention and how they relate to one another. The following discussion repeats some of the above discussion with less of an emphasis of the interrelationship of the elements of the present invention, but with more of an emphasis on the components and method steps of the elements of the present invention.
15

As discussed above, by logically grouping and categorizing the publisher's information, the publisher can then define the billing and advertising functions associated with the data sets to be published. After the publisher gathers all information that is intended for publication on a particular CD-ROM of series of CD-ROMs, the information is then be assigned the access and subscription attributes defined by the present invention. A standard publisher's configuration is shown in the block diagram of FIG. 5. There the publisher's workstation 36 is shown on which to gathering and organizing information. The publisher is provided with billing premastering software 41 for such organization. In communication with the
20 workstation is the CD-ROM writer driver 35 to create the CD-ROM. Finally, the key data base 42 which is stored at publisher's site contains the used keys and their alias', history and current attribute definitions. The key database 42 also contains a list of unused keys which the publisher can use and define the attributes for such
25

unused keys. After the publisher defines the use of a particular key, that information is sent to the remote billing/access center 23.

5 The encryption device 43 is stored on the publisher's PCMCIA card 33 shown in Figure 6. Each publisher is assigned a unique and personal PCMCIA card 33 which contains, in a FLASH or EEPROM non-volatile memory 44, the publishers personalities and provides audit information about data published and its author. The personalities of the publisher are similar to those of the user as described above. The non-volatile memory 44 further contains the publisher's unique storage variable (K_s) used as part of the password algorithm. The aforementioned information can be stored on the publisher's PCMCIA card and are encrypted by this local key. Additionally, the publisher's workstation automatically records the CD-ROM identification and KMIDs used to publish a particular CD-ROM. This audit data is stored and maintained by the key data base 42.

15 The digital signature provided by the PCMCIA card 33 assures the billing/access center and/or the subscriber that the published data was in fact published on the CD-ROM by the authorized publisher of that particular information. This feature avoids piracy of copyrighted material, as well as falsified records in the corporate, government and legal environment.

20 The audit information stored on the publisher's PCMCIA card 33 is auditable from the billing/access center 23. Since there is a transmission line between the billing/access center and the publisher, the billing/access center can access information stored on the publisher's PCMCIA card 33 to analyze the publisher's activity for many purposes, including improving the system.

25 The PCMCIA card 33 can be a hardware card or a software application for emulating the hardware card functions. As a standard feature, it contains a volatile memory or RAM 46 and a bus interface 47 so that it may communicate with the publisher's computer system 36.

Before the publisher can actually encrypt and/or sign any information to the CD-ROM, it logs onto the PCMCIA card 33 which supports a logon phrase either through the keyboard interface or one which can be directly input to the card reader. The phrase may be any length or any set of ascii characters the publisher assigns.

5 For enhanced security, the publisher may use biometrics (voice) after the logon phrase for a more secure logon which binds the publisher to the card and its resources. The publisher logs onto the card prior to performing any security related functions.

After logon, the publisher may use the resources of the PCMCIA card 33. The card, whether performed as a software function on the publisher's computer 36 or as

10 a separate hardware card, provides all of the cryptographic functions required by the publisher to generate a CD for supporting an electronic subscription service. The encryption for the CD application is performed at the sector level to support random access on large data bases. The microprocessor 48 operates as the encryption

15 device 43 to allow the publisher to associate files, directories, sub directories, volumes or whole media with a particular symmetric encryption key and is used to execute the encryption. Signature and key exchange algorithms are performed using the public/private key determined by the personality selected. These algorithms are in software for configurability but may also be implemented in hardware on the microprocessor. The microprocessor can be an off the shelf microprocessor. The

20 PCMCIA card 33 operates as a finite state machine. The publisher application is responsible for synchronization of key attribute definitions back to the remote billing/access center.

The flow chart of FIG. 7 illustrates a series of steps of the present invention, most of which have been described in detail above. After the program starts 51, the

25 data is organized into the data sets to be published on a CD-ROM in step 52. The billing structure for each data set is prepared in step 53. Then, different attributes are associated with the data sets. For example, if time duration is assigned according to decision box 54, the time base is set at step 56 and the attribute is correlated to the data set. Or, the number of byte of access can be assigned to the data set according

to decision box 57, then the number of bytes is set at step 58 and the attribute is correlated to the data set. Or, certain transactions can be defined by the publisher and set according to decision boxes 59 and 61 and then correlated to the data set. After the attributes are created and correlated, new keys are obtained from the key database 42 in step 62. The data is then ready to be encrypted. In step 63 the data is encrypted. In step 64, the key sector and signature tables are built. In step 66, the entire process is repeated for the next data set. When all of the data has been prepared, step 67 write the key sector and signature table to the CD and provides for the publisher to update its own records and the billing/access center database records.

FIGS. 8 and 9 are illustrations one of the ways the program is presented to the publisher. This user friendly interface allows the publisher to point, click and drag components for assigning the attributes. The publisher can group similar applications to be encrypted under the same encryption key group 68. If the publisher does not want portions of particular data sets encrypted, the publisher may select bypass step 69 so that any hypertext or key word searches associated with the file will not be encrypted. This is particularly useful if the subscriber wants to determine the number of incidents of a particular word or transaction before buying the data base.

After the publisher determines the key group associates and the level of encryption, the publisher is provided with a second set of menus for defining the billing attributes for the key group. FIG. 9 is an example of the type of interface provided to the user to set security defaults for the key group. These include but are not limited to: consecutive units of user access days, months or years; key start of user defined application turn on date; key expiration; total time of user access minutes, hours, days; total units transferred in bytes, words, or user defined transactions; and total user log ons. Key alias can be defined for easier key identification.

These options are available on a new (unused) key or already aliased keys (used). After these attributes are determined by the publisher, the premastering software will update the publisher key database 42 with these parameters. Should the

publisher be using an existing alias the publisher has the option to apply a cryptographic update process to this key. The process is defined by using a known fixed constant and mathematically applying this constant (via an exclusive or function) to the old key.

5 All updates are maintained with a key counter, which are associated with the key. This allows the publisher and subscriber to maintain synchronized keys and update counter which is published monthly with the published material. Subscription access is controlled via the number of updates allowed during the period of time purchased by the subscriber.

10 The key manager or data base 42 (see FIG. 5) will maintain an audit/history file of the KMIDs used with the individual CD-ROMs created by a publisher. After the CD-ROM is created the key manager 42 will automatically call the publisher's billing/access center and download the configured attribute information.

15 The CD-ROM contains information about the beginning and ending sectors for the associated KMIDs. This information is maintained in a separated table that can be located anywhere on the CD-ROM. FIG. 10 illustrates such a table. The publisher's digital signature file 70a contains signed data files 70b. Other files which have been discussed above including publisher's information 70c, the encryption algorithm information 70d, the update algorithm information 70e, the advertisement information
20 relating to the publishing data 70f, and the key sector and signature table 70g are also included on the CD-ROM.

The key sector and signature table 70g contain the information about the KMIDs used in creating this media. Most importantly, this table contains the stop and start sectors for the KMIDs used.

25 Turning to FIG. 11, many of the features shown in FIG. 2 are again shown, but in block diagram form. However, audit/decrypt device and call up application 71 are

distinguished from the user's computer 31. This device can either be on the user's PCMCIA card 29 or can be separate hardware or software installed on the user's computer 31.

5 The user's PCMCIA card 29 includes a standard bus interface 72 and RAM 73. The non-volatile memory includes such features as described above, such as personalities and audit functions. The microprocessor 76 includes an encryption/decryption, signature, key exchange algorithm.

10 The operation by the user of the features on the user's PCMCIA card 29 is shown in the flow chart of FIG. 13. After the start 77 of the sequence of events, in step 78 the user orders subscription service to obtain periodically distributed media. In step 79, the user receives the CD-ROM by, for example, mail and loads the card and the CD-ROM. On the user's computer screen, the user views information stored on the CD-ROM similar that shown FIG. 10. In step 81 the user develops and signs an electronic mail request for a key and sends it to the billing/access center. In step 15 82, after having been authenticated and authorized, the user obtains the key via e-mail from the billing/access center. In step 83, the key is stored on the user's PCMCIA card 29. The card further maintains an audit log of the user's activity according to the attributes configured. This audit can be accessed by the billing/access center remotely in order to monitor use for several purposes. For example, the use is audited 20 to provide publishers information as to how many times, after a subscription is published, the user views the same publication. Finally, in step 84, the user accesses the file of choice.

25 Referring to FIG. 14, features of the billing/access center 23 are shown in block diagrams. Features already discussed include the remote links 27 to both the users and the publishers. The bulk key data base 85 keeps keys to be distributed to the publishers for their use in encrypting data. The subscriber data base 86 includes lists of all subscribers and certain information about them obtained prior to or after their use of the system or through audits. The publisher data base 87 contains the

publisher's use of the keys and their associated KMIDs. The bulletin board 88 holds messages which are incoming from subscribers and publishers. It is also available to send messages to both the publishers and the subscribers telling them of new features of the system or other information.

5 The billing/access center process starts 89 by polling the bulletin board or incoming call for incoming requests from subscribers. In step 92, the billing/access center reads the electronic request and authenticates the subscriber by checking the electronic signature of the message. In step 93, from the KMID provided by the request, it makes a match to the attributes to provide billing information. Optionally,
10 the billing/access center can communicate with the user in step 94 to provide billing options to the user, such as time payments or offers not indicated on the CD-ROM menu. When the billing is settled, in step 95, the billing/access center validates the subscriber's payment method and receives a purchase order from the user. If the signature or the payment method are not satisfactory, the billing/access center denies
15 the key and log attempt in step 96. If they are satisfactory, the key is downloaded to the user's PCMCIA card 29 in step 97. In step 98, the billing/access center queries for more requests. If there are none, it downloads the audit file, obtains the current user KMID audit file from the card in step 99 and updates the subscribers database 97 and updates the publisher's account in steps 100 and 101 respectively. If the
20 response is yes to the query of step 98, the system returns to step 93 and begins the process over again, but with respect to a different data file and KMID.

 The billing/access center's communication with the user can be interactive as described above, or it can be configured so that it a request is sent and it is either
25 approved or denied. In any event, the billing/access center receives the KMID and if authorization is achieved, the key is sent to the user to access the data stored on the CD-ROM.

 As discussed briefly above, the cryptographic update process provides a way in which access to out-of-date information or issues released beyond a subscriber's

time period is blocked. The cryptographic update process is yet another flag in the attribute data structure. The publisher of a monthly or bi-weekly periodical will publish a large amount of information regularly for what can be a very long period time (years). The publisher of periodicals will have subscribers to their service receiving this data. The subscriber joins and is downloaded with a key that is valid for a period of time that their subscription service is online. However, this puts the publisher in a very vulnerable position, if the same key is used for all encryption during the life of the publication. The objective of the remote cryptographic update process is to allow the publisher of a periodical to ship each periodical under a different encryption key each month without having to download a new key to their current set of subscribers.

Ideally, the publisher will distribute the information encrypted under a different key each month. This protects the publisher's information from an external attacker determining their key and obtaining all of their publications. However, this implies that a subscriber would be required to download a new key each month, for example. This may be very cumbersome to the subscriber. The system of the present invention defines the use of a user site cryptographic update that is applied to the current (or monthly) key to "generate" a new key based on the previous month's key. Since all cards understand the algorithm to be used for the update process, they derive the same key value. The publisher is aware of the algorithm and uses it to generate the updated key value for the encryption process. If a publisher puts out material monthly, they would perform a monthly "update" on the key for each new publication. When the subscriber obtains the new CD-ROM, an update counter of the CD-ROM tells the user's PCMCIA how many updates have been performed. The update counter is used to maintain synchronization between publisher and subscriber.

For example, turning to FIG. 16, there is shown a one year subscription service period. The twelve months are identified in column 106. Each month has a different key associated with it as shown in column 107, such indicated as K_A , K_B , and so on. "Subscriber One" indicated in column 108 is shown as having a six month subscription starting in the second month of the year. "Subscriber One" receives key K_B to access

the data distributed in the second month. The update process as described above updates key K_B through a mathematical operation where the update process, U , acts on the previous month's key. For example, when U acts on K_B , $K_C = UK_B$. Moreover, when the CD for the third month of the subscription becomes available, U acts on K_C so that $K_D = UK_C = UUK_B$. K_D through K_G are generated in the same manner. Thus, through the cryptographic update process of the present invention, "Subscriber One" receives a set of keys which operate to access the issues between month two and month seven. A different subscriber, "Subscriber Two" as indicated by column 109, also has a six month subscription, however, it begins in the fourth month and receives key K_D . The update process of the present invention updates key K_D so that U acts on K_D , $K_E = UK_D$. Moreover, when the CD for the third month of the subscription becomes available, U acts on K_D so that $K_F = UK_E = UUK_D$. K_G through K_I are generated in the same manner. Thus, while "Subscriber One" and "Subscriber Two" have their subscriptions during different time periods which overlap, they use the same keys to access the overlapping months through the update process. The process of the generation of the access codes from the initially downloaded key for access to a certain portion of the year's issues through a monthly update, allows the publisher to provide subscription service starting at different times and having different lengths, without providing access to more data than the authorized service. The KMID parameters define the number of updates purchased. In the example of FIG. 16, the KMID would define five (5) updates for both users.

Thus, the present invention includes a data retrieval system for use by a user which includes a plurality of portable data storage means, such as CD-ROMs, wherein each of which includes data stored on certain ones of the plurality of CD-ROM, for example, issues of a particular publication which is sequentially distributed. Portions of the data on the CD-ROMs is selected by the user which are accessible by a set of access codes (i.e., K_B to K_G) which is part of a larger group of access codes (i.e., K_A to K_I) wherein one of the set of access codes is a transmitted access code, such as transmitted to said user by the billing/access center. To access previously inaccessible ones of the plurality of CD-ROMs, the CD-ROMs include a code which is

cooperative with the transmitted access code for generating updated access codes for access to data on other certain ones of the plurality of CD-ROMs.

5 The update process uses the current key (the one used in the months of the publication). To this key a fixed and known constant is mathematically applied, for example, exclusive OR'd, to the current key. The resultant value from the mathematical operation is used as the decryption key for the next publication. All keys with update attributes are maintained with their update counter. This allows the user to synchronize their keys even if they missed one or two publications. This process occurs at the subscriber's site. The publisher performs the same functions and
10 applies the same value to generate the new encryption key. The information is encrypted with the newly updated key. The encryption information and the update counter, which is unencrypted, is recorded onto the CD-ROM for distribution.

In the Claims:

1. A system for accessing data by a user, comprising:

processor means for processing said data;

portable data storage means for storing said data in a manner requiring
5 different access codes for accessing correspondingly different data stored on said
portable data storage means by the user;

controller means in communication with said processor means for receiving a
signal representative of one of said different access codes from a remote location and
for sending a signal which enables access by said processor means to a selected
10 portion of said data on said portable data storage means using one of said access
codes;

remote authorization means located at a location remote from said processor
means and said controller means and in communication with the aforesaid means, said
remote authorization means for transmitting said one access code signal to said
15 controller means from said remote location in response to an authorization request
signal sent by the user to said remote authorization means;

a plurality of portable data storage means each of which includes data stored
on certain ones of said plurality of portable data storage means including portions
selected by said user, said selected portions on said certain portable storage means
20 being accessible by a set of access codes, wherein one of said access codes is a
transmitted code, such transmitted to said user to provide access to said selected
portions of said data stored on certain ones of said plurality of portable data storage
means; and

wherein said plurality of data storage means includes means cooperative with
25 said transmitted access code for generating updated access codes for access to
previously inaccessible parts of said selected portions of said data on certain ones of
said plurality of portable data storage means.

- 5 2. A system as recited in Claim 1 wherein said selected portions of said data stored on certain ones of said plurality of portable data storage means are provided to said user sequentially and said transmitted access code provides said user with access to said data stored on the first portable data storage means of said sequence of portable data storage means.
3. A system as recited in Claim 1 wherein each of said access codes is correlated with an identifying code and wherein said authorization request comprises said identifying code.
4. A system as recited in Claim 3 wherein said identifying code is representative of an attribute.
5. A system as recited in Claim 4 wherein said attribute is representative of a use of said data.
6. A system as recited in Claim 1 wherein said controller means is a hardware configuration.
7. A system as recited in Claim 1 wherein said controller means is a software configuration.
- 5 8. A system as recited in Claim 1 wherein said data stored on said portable data storage means includes identifying codes associated with each of said different portions of said data.
9. A system as recited in Claim 8 wherein said identifying codes are correlated with attributes.
10. A system as recited in Claim 9 wherein said attribute is representative of use of said data.

11. A system as recited in Claim 8 wherein said authorization request includes one of said identifying codes.

12. A method for distributing data to a user comprising the steps of:
on a portable data storage unit, providing encrypted data, such requiring an access code to decrypt said data to provide access thereto;
delivering said portable data storage unit to said user;
at a remote location, generating an authorization signal which causes an
5 access code to be transmitted to said user to enable said user to access a portion of said encrypted data by decrypting a portion of said encrypted data;
applying said access code to said encrypted data to decrypt a portion of said encrypted data;
processing said decrypted portion of said encrypted data ; and
wherein each of said access codes is correlated with an access code identifier.

13. A method as recited in Claim 12 further comprising a plurality of portable data storage means each of which includes data stored on certain ones of said plurality of portable data storage means including portions selected by said user, said selected portions on said certain portable storage means being accessible by a set of access codes, wherein one of said set of access codes is a transmitted access code, such
5 transmitted to said user to provide access to said selected portions of said data stored on certain ones of said plurality of portable data storage means.

14. A method as recited in Claim 13 wherein said plurality of data storage means includes means cooperative with said one transmitted access code for generating updated access codes for access to previously inaccessible parts of said selected portions of said data on certain ones of said plurality of portable data storage means.

15. A method as recited in Claim 13 wherein said selected portions of said data stored on certain ones of said plurality of portable data storage means are provided to

said user sequentially and said transmitted access code provides said user with access to said data stored on the first portable data storage means of said sequence of portable data storage means.

16. A method as recited in Claim 12 wherein said authorization request by said user includes said access code identifier.

17. A method as recited in Claim 12 wherein said access code identifier is representative of an attribute.

18. A method as recited in Claim 17 wherein said attribute is representative of use of said data.

19. A method as recited in Claim 12 wherein said applying step is carried out by hardware configuration.

20. A method as recited in Claim 12 wherein said applying step is carried out by software configuration.

21. A method as recited in Claim 12 wherein said data stored on said portable data storage unit includes identifying codes associated with different portions of said data.

22. A method as recited in Claim 21 wherein said identifying codes are correlated with attributes.

23. A method as recited in Claim 22 wherein said attributes are representative of use of said data.

24. A method for distributing information in the form of data sets and providing access thereto, comprising the steps of:

encrypting said data sets so that different access codes are required to
decrypt different portions of said data sets;

correlating said data sets with access codes identifiers;

writing said data sets onto a data storage means;

5 remotely providing said data access controller with one of said different access
codes to decrypt a selected one of said encrypted data sets in response to the receipt
of one of said access code identifiers; and

transferring said data storage means from a first location to a second location
wherein at said second location a data storage controller which is capable of applying
10 said access codes to said data storage means is provided; and

said data access controller accessing said data sets written onto said data
storage means; and

wherein said access codes are further associated with attributes.

25. A method as recited in Claim 24 further comprising a plurality of data storage
means each of which includes data stored on certain ones of said plurality of data
storage means including portions selected by said user, said selected portions on said
certain storage means being accessible by a set of access codes, wherein one of said
5 set of access codes is a transmitted access code, such transmitted to said user to
provide access to said selected portions of said data stored on certain ones of said
plurality of data storage means.

26. A method as recited in Claim 25 wherein said plurality of data storage means
includes means cooperative with said one transmitted access code for generating
updated access codes for access to previously inaccessible parts of said selected
portions of said data on certain ones of said plurality of portable data storage means.

27. A method as recited in Claim 25 wherein said selected portions of said data
stored on certain ones of said plurality of data storage means are provided to said

user sequentially and said transmitted access code provides said user with access to said data stored on the first data storage means of said sequence of data storage means.

28. A method as recited in Claim 24 wherein said attributes are representative of use of said data.

29. A system for encrypting data, comprising:

receiving means for receiving said data;

segmenting means in communication with said receiving means for segmenting said data into individual data sets;

5 a memory medium in communication with said segmenting means, said memory medium including programming means stored thereon for encrypting said individual data sets and for assigning access code identifiers to said individual data sets, each of said access code identifiers associated with a particular access code for decrypting one of said individual data sets; and

10 processor means in communication with said memory medium for writing said encrypted individual data sets to a portable data storage means.

30. A system as recited in Claim 29 wherein said plurality of data storage means includes means cooperative with said one transmitted access code for generating updated access codes for access to previously inaccessible parts of said selected portions of said data on certain ones of said plurality of portable data storage means.

31. A system as recited in Claim 29 wherein said access code is further associated with an attribute.

32. A system as recited in Claim 31 wherein said attribute is representative of use of said data set.

33. A system as recited in Claim 29 further comprising:

transfer means for transferring said portable data storage means in a remote location;

controller means for receiving a particular access code for decrypting one of said individual data sets and for providing access thereto by a processor; and

5 authorization means for providing one of said different access codes to said controller means in response to an authorization request.

34. A system as recited in Claim 33 wherein said controller means is a hardware configuration.

35. A system as recited in Claim 33 wherein said controller means is a software configuration.

36. A method for encrypting data sets to control access thereto, comprising the steps of:

defining attributes in a manner which corresponds to particular properties of said data sets;

5 binding said attributes to access codes;

encoding said data sets so they may be decrypted by said access codes when said access codes signals are applied to said data sets by a processor; and

storing said encoded data sets on portable data storage means.

37. A method as recited in Claim 36 wherein attributes are representative of a use of said data.

38. A method as recited in Claim 36 wherein said access codes are correlated with identifying codes.

39. A method as recited in Claim 36 wherein access to said encoded data sets on said portable data storage means is provided by a remote authorization center and further comprising a controller in communication with said portable data storage

means and wherein, upon transmitting one of said identifying codes to said remote authorization center, one of said access codes is downloaded to said controller in communication with said portable data storage means wherein said controller provides access to said data sets stored on said portable data storage means.

40. A method recited in Claim 39 wherein said controller means is a hardware configuration.

41. A method as recited in Claim 39 wherein said controller means is a software configuration.

42. A method as recited in Claim 36 further comprising a plurality of portable data storage means each of which includes data stored on certain ones of said plurality of portable data storage means including portions selected by said user, said selected portions on said certain portable storage means being accessible by a set of access codes, wherein one of said set of access codes is a transmitted access code, such
5 transmitted to said user to provide access to said selected portions of said data stored on certain ones of said plurality of portable data storage means.

43. A method as recited in Claim 42 wherein said plurality of data storage means includes means cooperative with said one transmitted access code for generating updated access codes for access to previously inaccessible parts of said selected portions of said data on certain ones of said plurality of portable data storage means.

44. A method as recited in Claim 42 wherein said selected portions of said data stored on certain ones of said plurality of portable data storage means are provided to said user sequentially and said transmitted access code provides said user with access to said data stored on the first portable data storage means of said sequence of portable data storage means.

5 45. A data retrieval system for use by a user comprising a plurality of portable data storage means each of which includes data stored on certain ones of said plurality of portable data storage means including portions selected by said user, said selected portions on said certain portable storage means being accessible by a set of access codes, wherein one of said set of access codes is transmitted by a remote central processing unit to a user at a second location, such transmitted to said user to provide access to said selected portions of said data stored on certain ones of said plurality of portable data storage means; and

wherein said plurality of data storage means includes means cooperative with said transmitted access code for generating updated access codes for access to previously inaccessible parts of said selected portions of said data on certain ones of said plurality of portable data storage means.

46. A system as recited in Claim 45 wherein said selected portions of said data stored on certain ones of said plurality of portable data storage means are provided to said user sequentially and said transmitted access code provides said user with access to said data stored on the first portable data storage means of said sequence of portable data storage means.

1/13

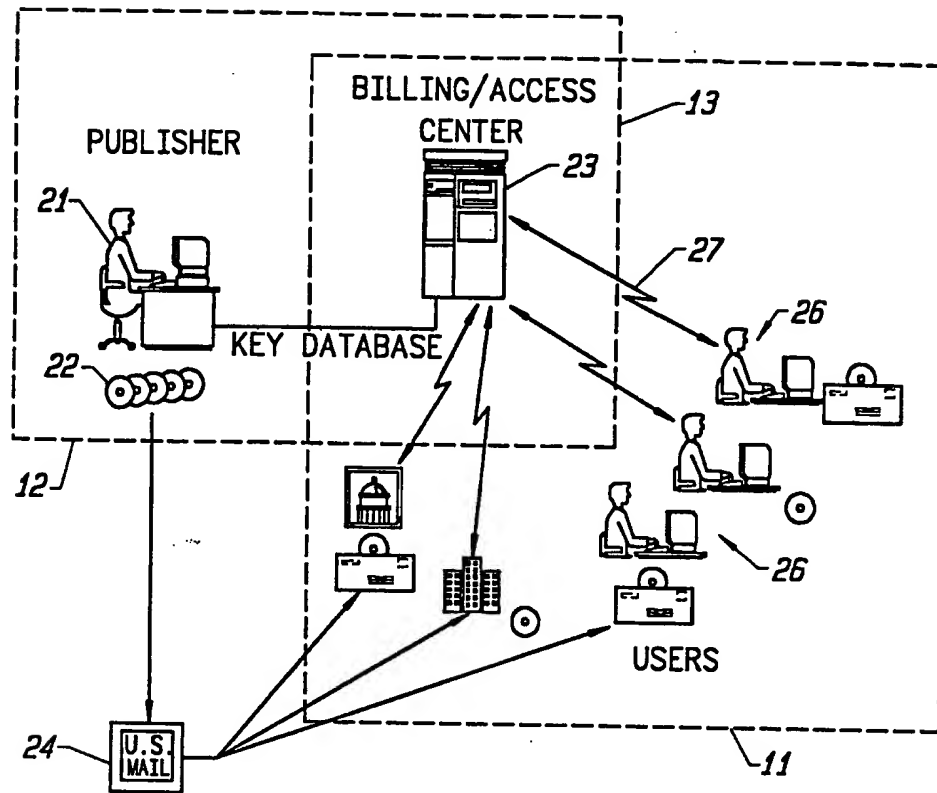


FIG. 1

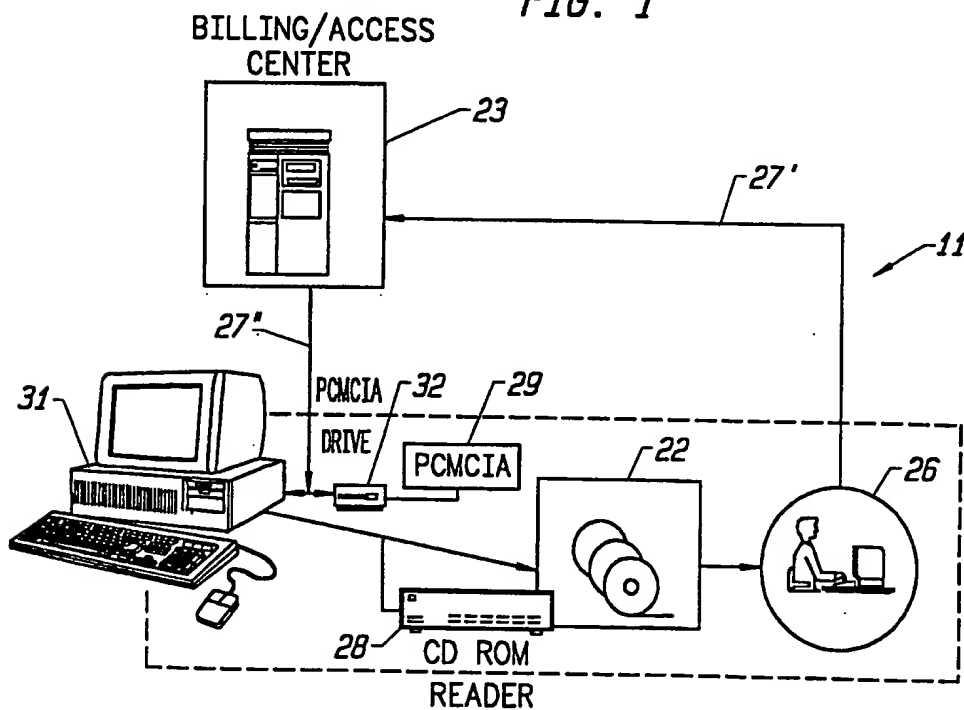


FIG. 2

SUBSTITUTE SHEET (RULE 26)

2/13

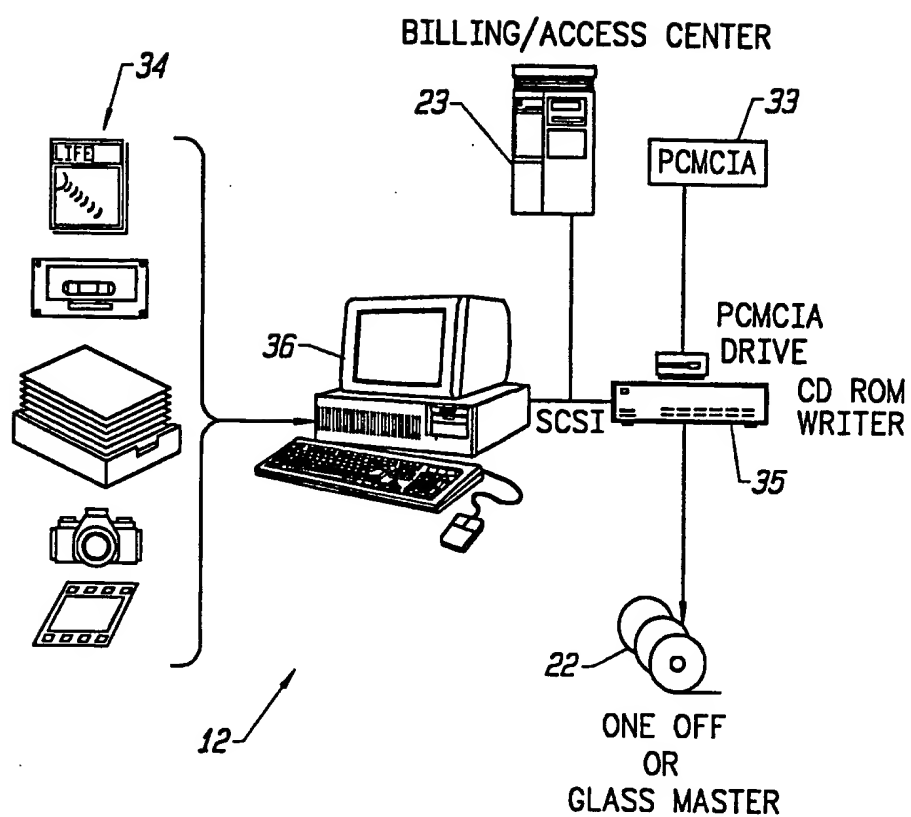


FIG. 3

3/13




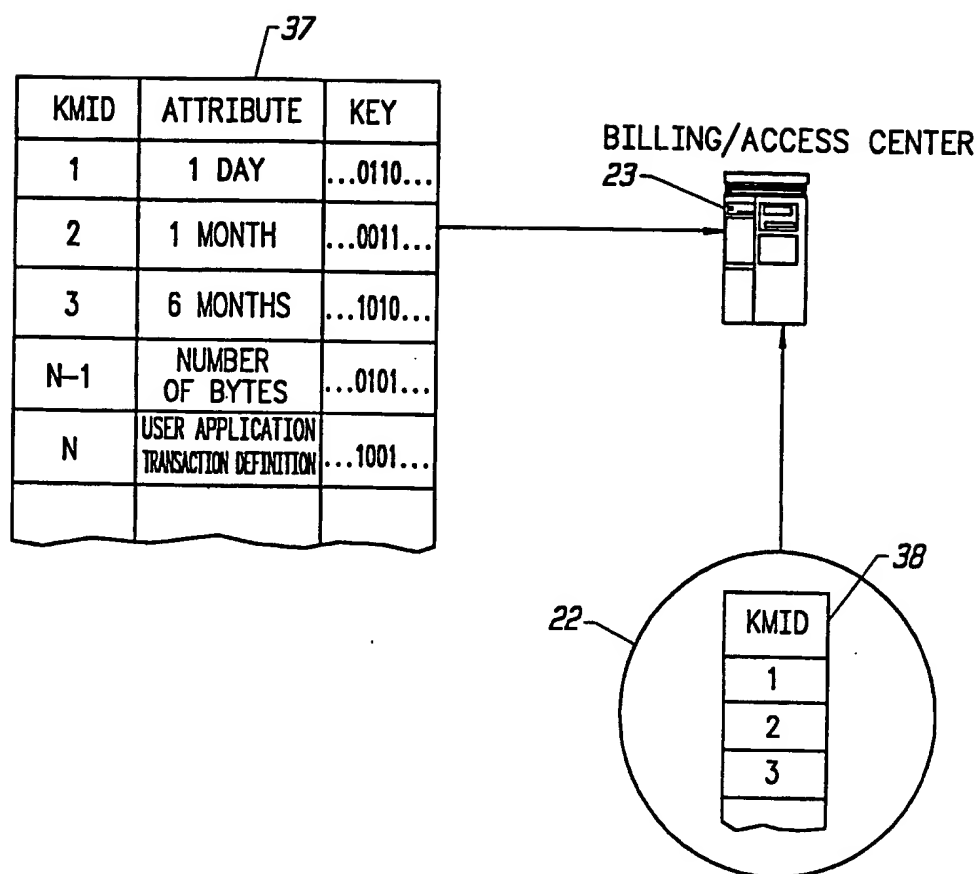


FIG. 4

4/13

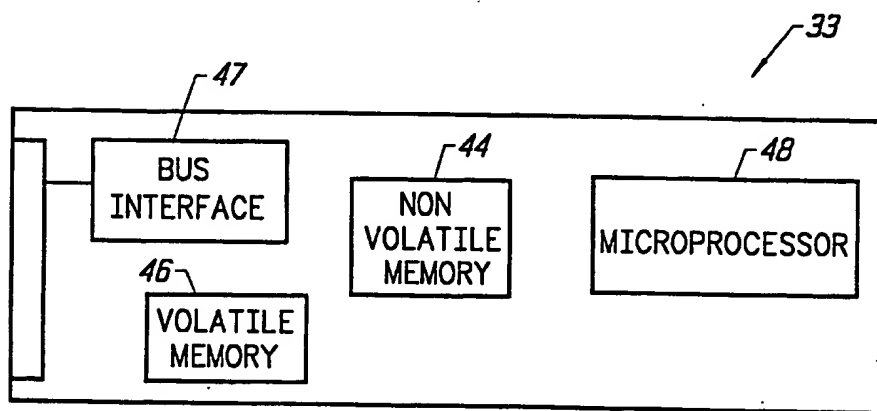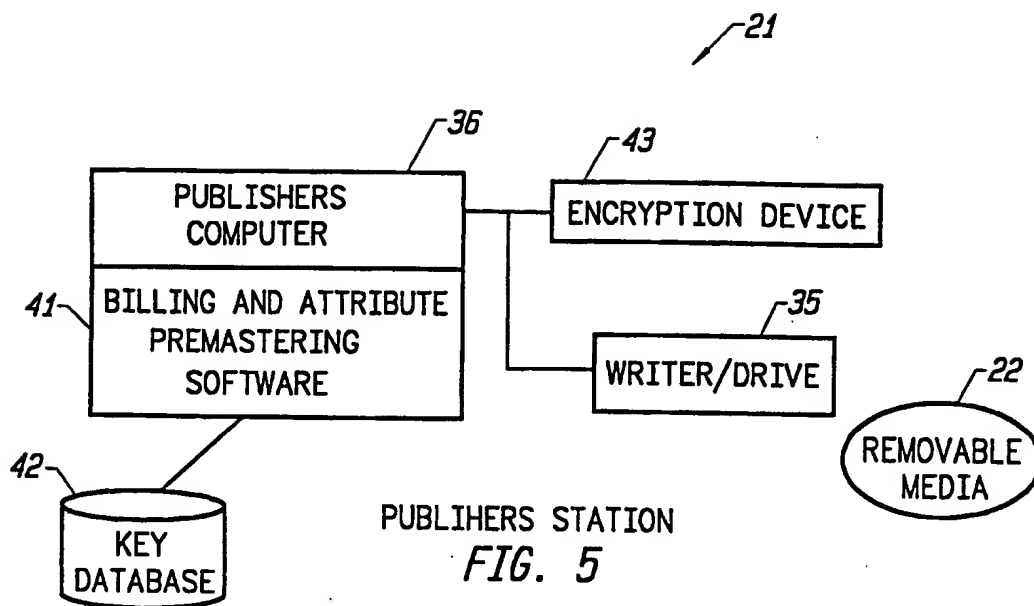

5/13

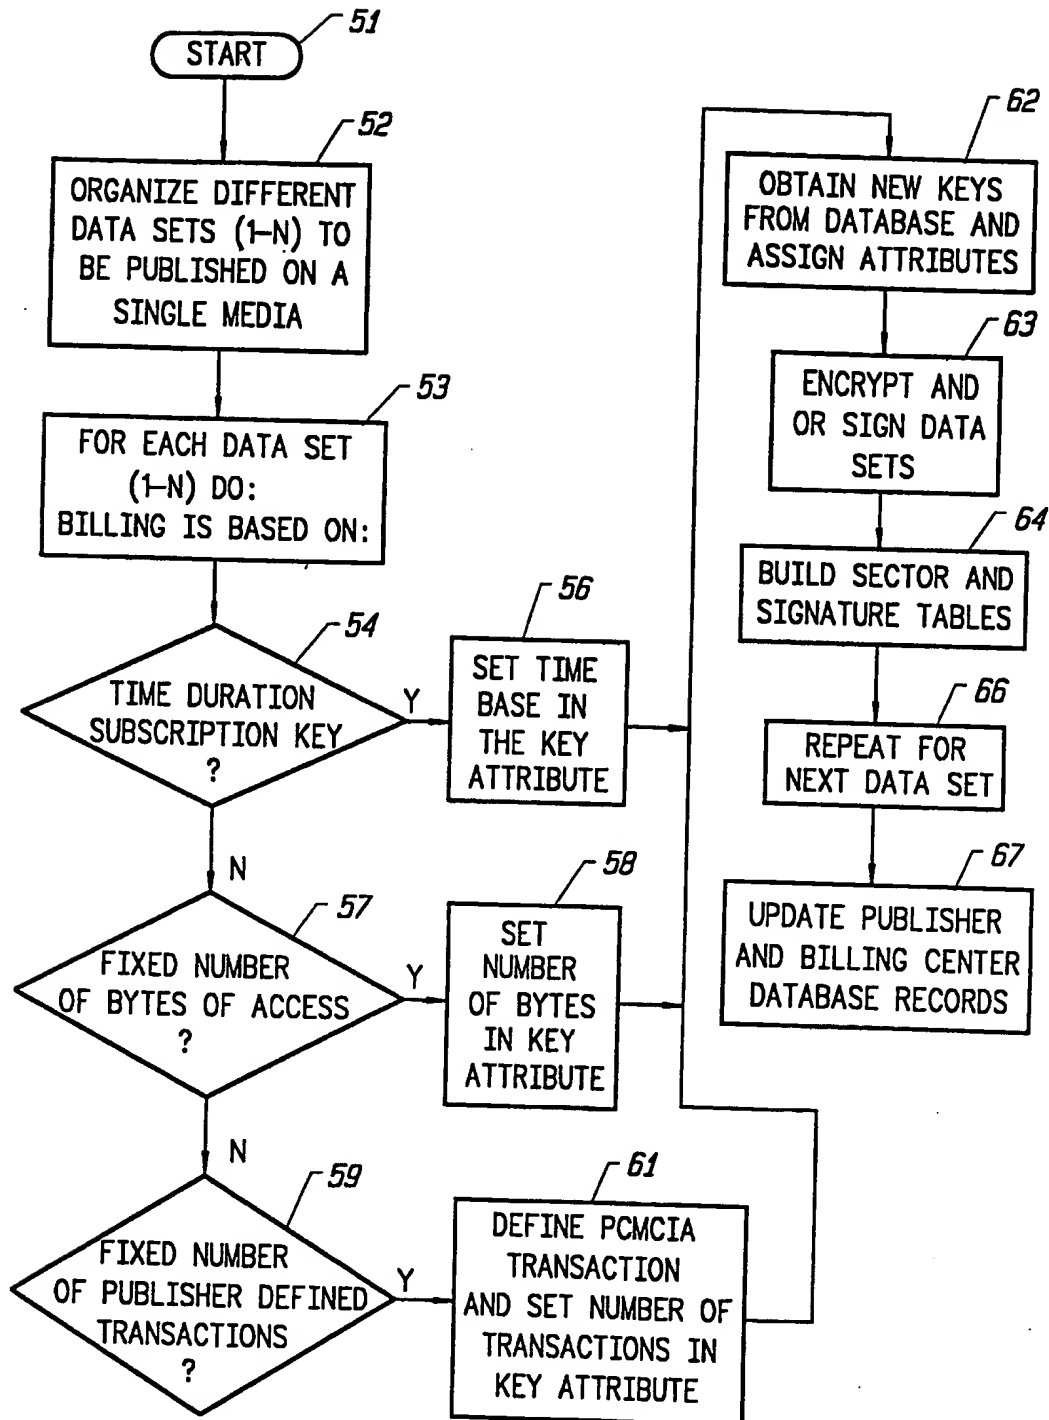

PUBLISHERS BILLING S/W

FIG. 7

SUBSTITUTE SHEET (RULE 26)

6/13

68

Secure Files							▽	△
File Name	Sign	Encrypt	Receive	Skip Index	Skip Keywrd	Group	↑	
C:\DIR1\DIR2\FILENAMExxx						1		
C:\DIR1\DIR2\FILENAMExxx						1		
C:\DIR1\DIR2\FILENAMExxx		x	x			1		
C:\DIR1\DIR2\FILENAMExxx						2		
C:\DIR1\DIR2\FILENAMExxx						2		
C:\DIR1\DIR2\FILENAMExxx						1		
C:\DIR1\DIR2\FILENAMExxx						1		
C:\DIR1\DIR2\FILENAMExxx						1		
C:\DIR1\DIR2\FILENAMExxx						2		
C:\DIR1\DIR2\FILENAMExxx						1		
C:\DIR1\DIR2\FILENAMExxx						1		
C:\DIR1\DIR2\FILENAMExxx						1	↑	

Key Attributes

<input type="checkbox"/> Consecutive Days Of User Access	90	<div>New Key</div> <div>Cancel</div> <div>Done</div>
<input type="checkbox"/> Key Start Date	12/22/93	
<input type="checkbox"/> Key Expiration Date	12/22/93	
<input type="checkbox"/> Total Minutes Of User Access	1,000	
<input type="checkbox"/> Total Bytes Transferable	10,000,000	
<input type="checkbox"/> Total User Log Ons	10	
<input type="checkbox"/> Total Security Transactions	500	
<input type="checkbox"/> User Defined Transaction		

FIG. 8

7/13

Security Defaults		▽	△
Default Security Settings			
<input type="checkbox"/> Sign	<input type="checkbox"/> Bypass Index	<div>Done</div> <div>Cancel</div>	
<input type="checkbox"/> Encrypt	<input type="checkbox"/> Bypass Keywords		
<input type="checkbox"/> Record Level	<input type="checkbox"/> Bypass Directory		
Default Key Attributes			
<input type="checkbox"/> Consecutive Days Of User Access	90	Days	↑
<input type="checkbox"/> Key Start Date	12/22/93		
<input type="checkbox"/> Key Expiration Date	12/22/93		
<input type="checkbox"/> Total Minutes Of User Access	1,000	Minutes	↑
<input type="checkbox"/> Total Bytes Transferable	10,000,000	Bytes	↑
<input type="checkbox"/> Total User Log Ons	10		
<input type="checkbox"/> Total Security Transactions	500		

FIG. 9

8/13

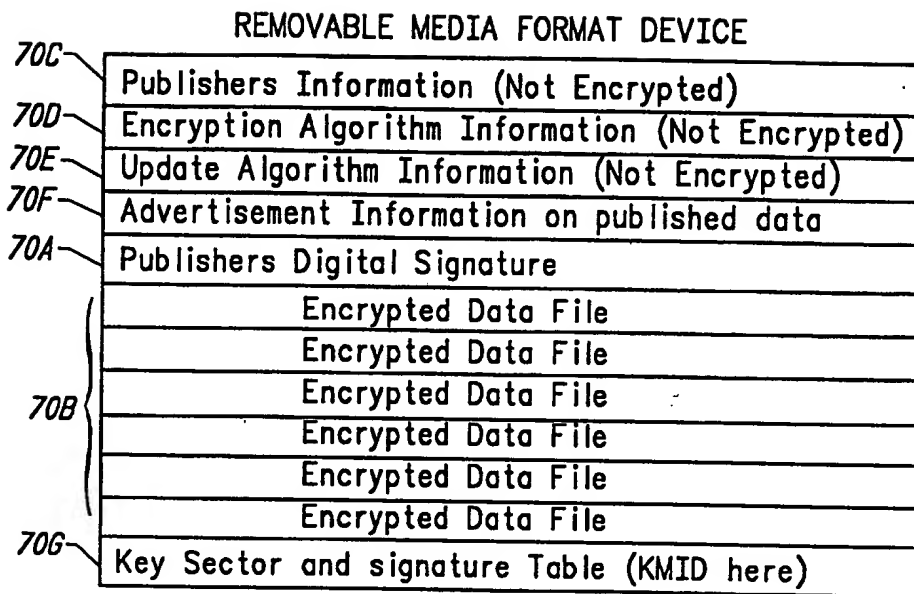


FIG. 10

9/13


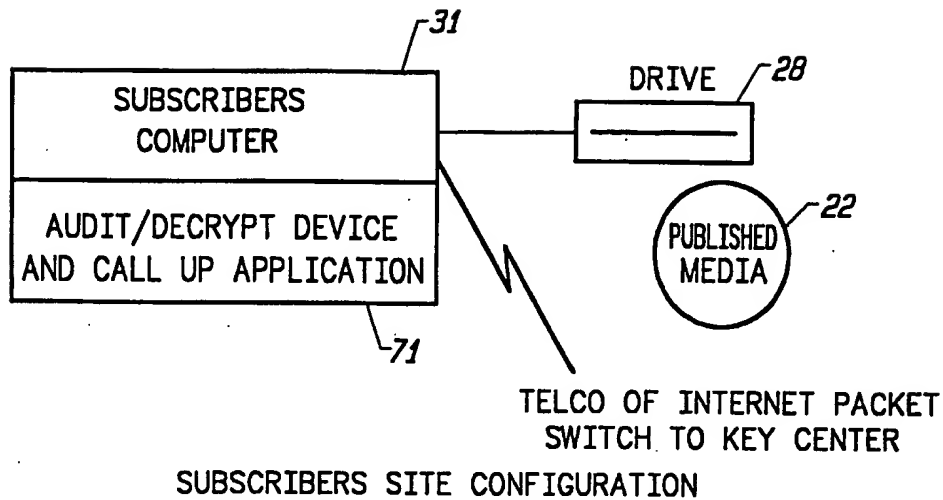



FIG. 11

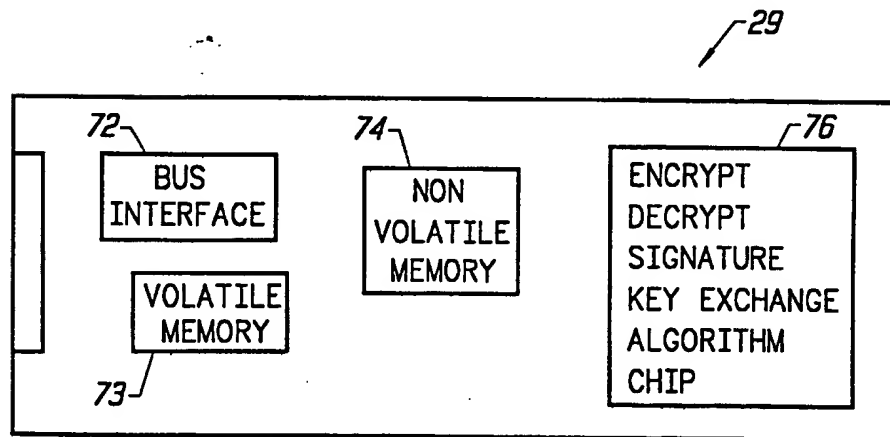

AUDIT DECRYPT DEVICE

FIG. 12


10/13

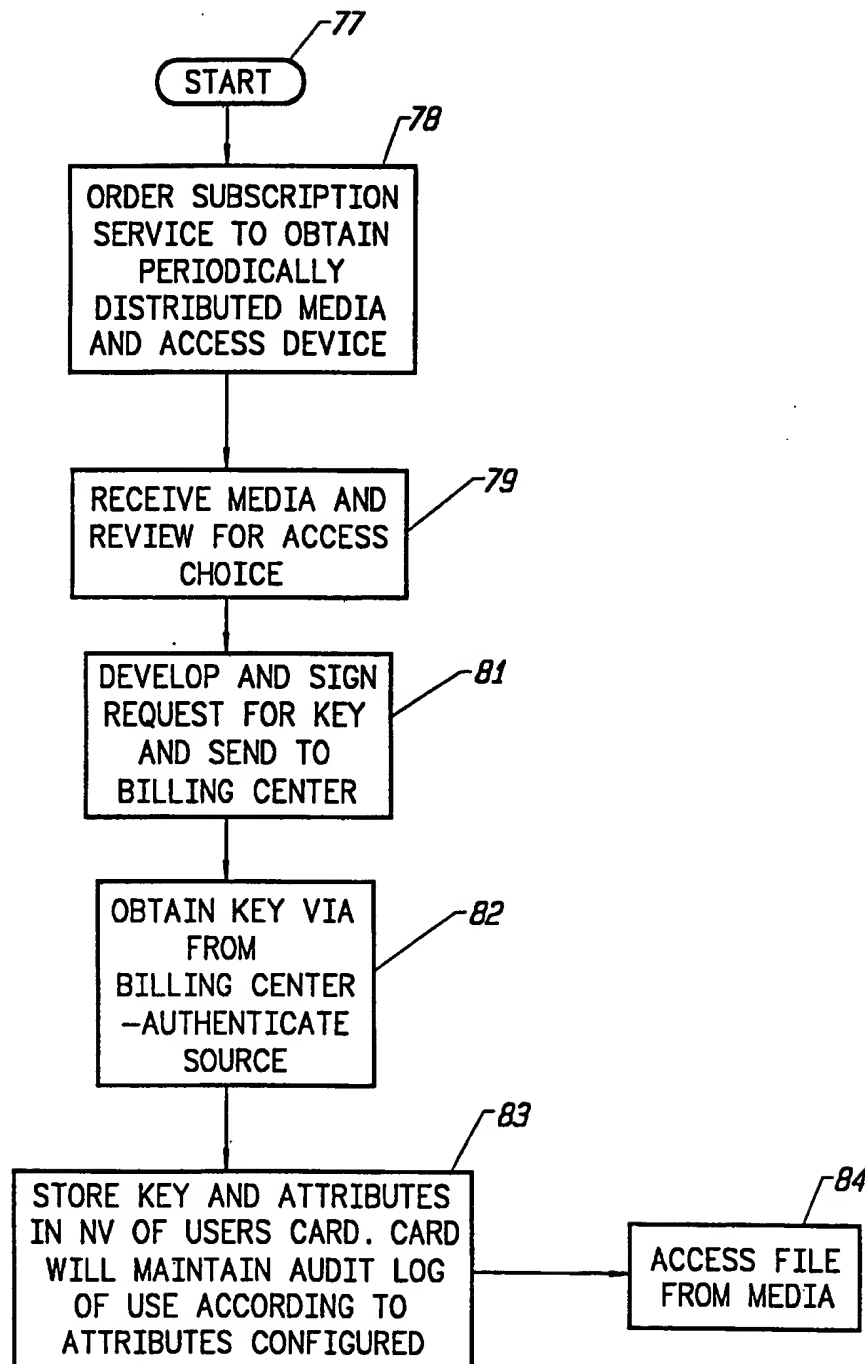

SUBSCRIBERS KEY REQUEST PROCESS

FIG. 13


11/13

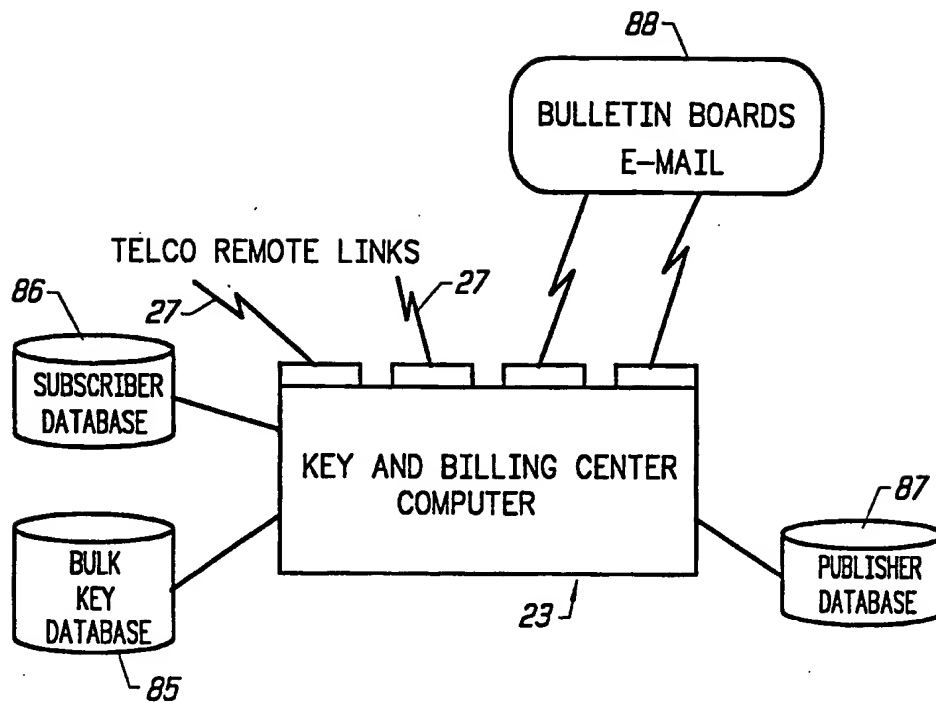

BILLING/ACCESS CENTER AND DATABASES

FIG. 14

12/13

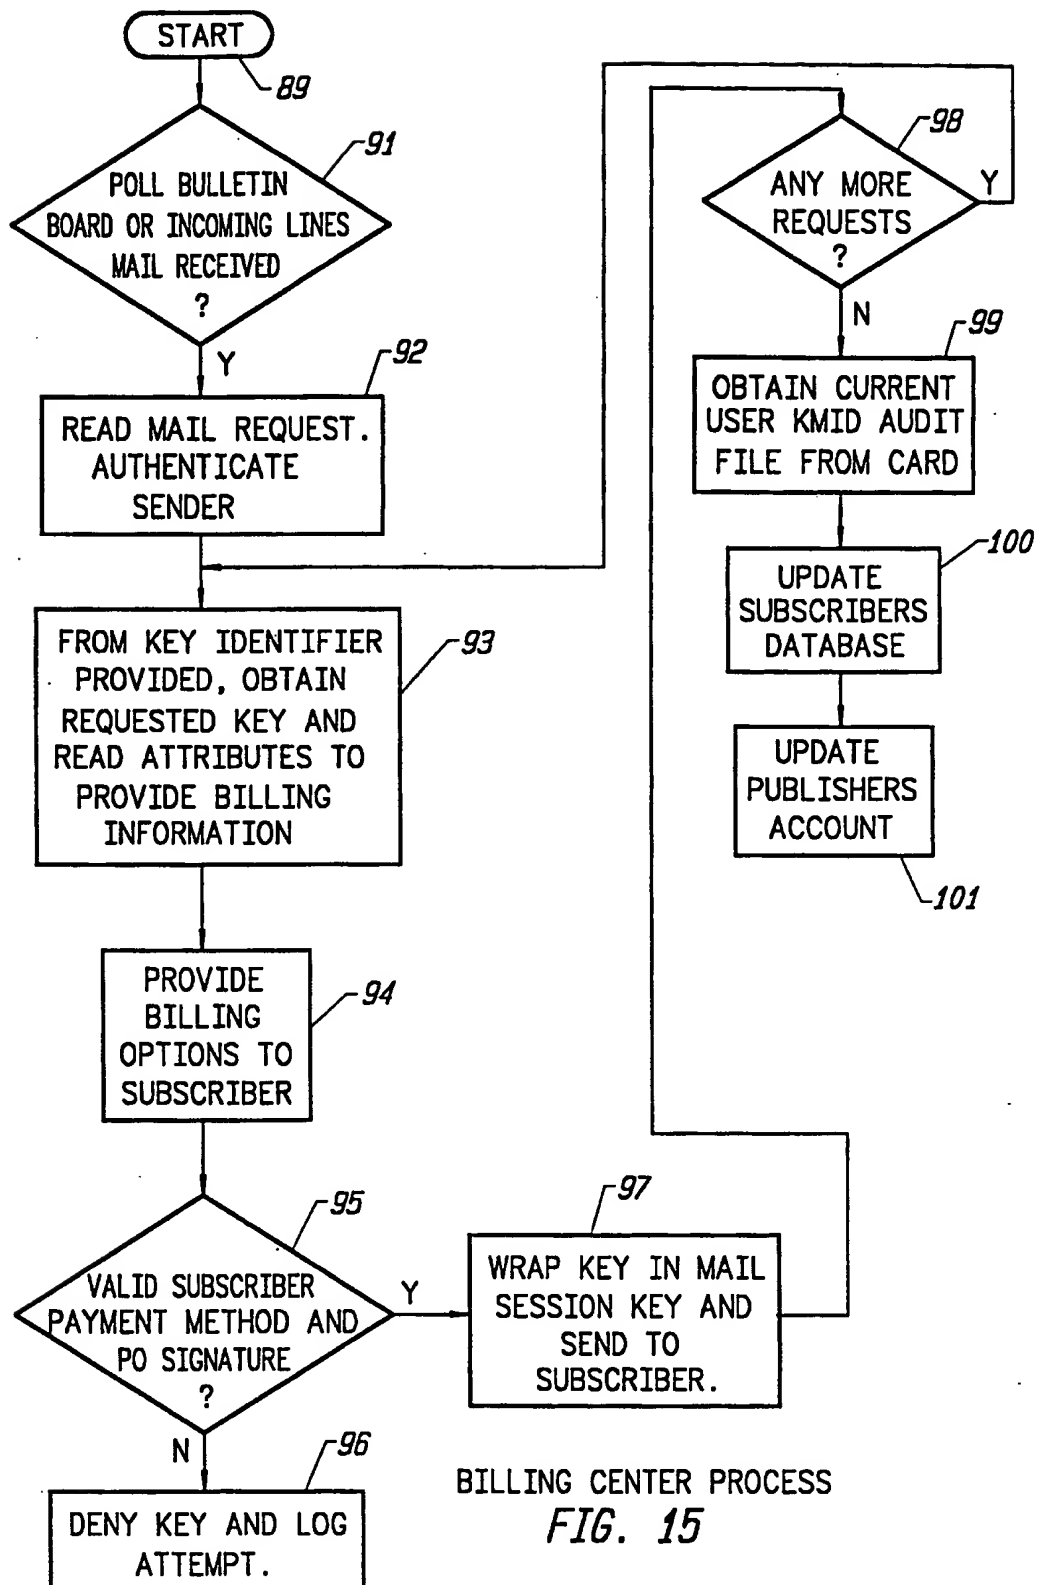

BILLING CENTER PROCESS

FIG. 15

13/13

MONTH	KEY	SUBSCRIBER ONE	SUBSCRIBER TWO
1	K_A		
2	$K_B = UK_A$	6 MONTHS	
3	$K_C = K_B = UK_A$		
4	$K_D = UK_C$		6 MONTHS
5	$K_E = UK_D$		
6	$K_F = UK_E$		
7	$K_G = UK_F$		
8	$K_H = UK_G$		
9	$K_I = UK_H$		
10	$K_J = UK_I$		
11	$K_K = UK_J$		
12	$K_L = UK_K$		

e.g. ONE YEAR SERVICE PERIOD

FIG. 16

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US94/10455

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :H04K 1/00

US CL :Please See Extra Sheet.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 380/25

380/22,23,24,28,29,30,49,50

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US, A, 4,888,798 (EARNEST) 19 DECMEBER 1989. SEE FIGURE 2.	1-46
X	US, A, 4,827,508 (SHEAR) 02 MAY 1989 SEE FIGURE 4.	1-46

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be part of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*A* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

13 OCTOBER 1994

Date of mailing of the international search report

DEC 13 1994

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer
TOD R. SWANN

Telephone No. (703) 308-0475

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US94/10455

A. CLASSIFICATION OF SUBJECT MATTER:

US CL :

380/25

380/22,23,24,28,29,30,49,50